








WALL-LIGHT-180

WALL-LIGHT-180A	8xLED CREE 9W 100V-240V 600lm 3000K/4200K
WALL-LIGHT-180B	18xLED SMD 9W 100V-240V 550lm 3000K/4200K
WALL-LIGHT-180R7S	L=78max 150W Halogen 220V-230V
WALL-LIGHT-180G24	G24d-3 26W Fluorescent 220V-230V




Distance	Average Illuminance	Diameter
1m	44.49, 93.54 lx	183.05 cm
2m	11.12, 23.39 lx	366.11 cm
3m	4.944, 10.39 lx	549.16 cm
4m	2.781, 5.846 lx	732.22 cm
5m	1.780, 3.742 lx	915.27 cm

Material: Die-casting aluminum body.
Finishing: Surface anti-ageing electrostatic spray processing.
Internal box: 230x105x135
External box: 285x245x230

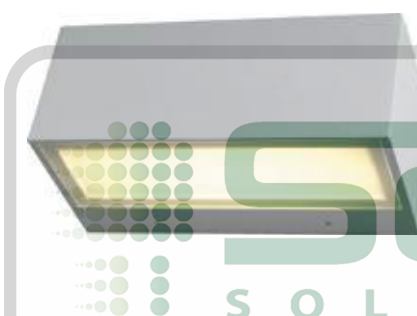


WALL-LIGHT-181M

WALL-LIGHT-181MLED	72xLED SMD 15W 100V-240V 500lm 3000K/4200K
WALL-LIGHT-181MR7S	L=78max 150W Halogen 220V-230V
WALL-LIGHT-181MG24	G24d-2 18W Fluorescent 220V-230V
WALL-LIGHT-181ME27	E27 max 60W 220V-230V




Distance	Average Illuminance	Diameter
1m	11.32, 23.06 lx	97.86 cm
2m	2.829, 5.766 lx	195.73 cm
3m	1.257, 2.563 lx	293.59 cm
4m	0.7072, 1.441 lx	391.45 cm
5m	0.4526, 0.9225 lx	489.31 cm

Material: Die-casting aluminum body.
Finishing: Surface anti-ageing electrostatic spray processing.
Internal box: 235x105x125
External box: 330x250x270



WALL-LIGHT-182S

WALL-LIGHT-182SLED	60xLED SMD 9W 100V-240V 420lm 3000K/4200K
WALL-LIGHT-182SR7S	L=78max 150W Halogen 220V-230V



Distance	Average Illuminance	Diameter
1m	11.32, 23.06 lx	97.86 cm
2m	2.829, 5.766 lx	195.73 cm
3m	1.257, 2.563 lx	293.59 cm
4m	0.7072, 1.441 lx	391.45 cm
5m	0.4526, 0.9225 lx	489.31 cm

Material: Die-casting aluminum body.
Finishing: Surface anti-ageing electrostatic spray processing.
Internal box: 175x85x110
External box: 270x185x240

