



Dirección: Cdla. Atarazana, Coop.29 de Junio Mz 103D Solar 1

Tel: +593 2296685

Celular: +593 98 683 1067

Email: info@soled.com.ec

Web: www.soled.com.ec

Guayaquil-Ecuador







BOLLARD-104FA/104FG

Description


Material: Die-casting aluminum cover extruded aluminum pole.
 Finishing: Surface anti-ageing electrostatic spray processing.
 Optical system: PMMA diffuser.



Photometric Data

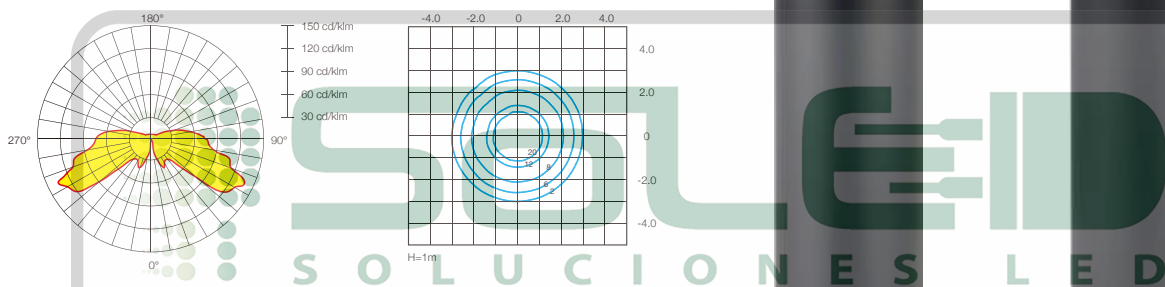

Dimensions

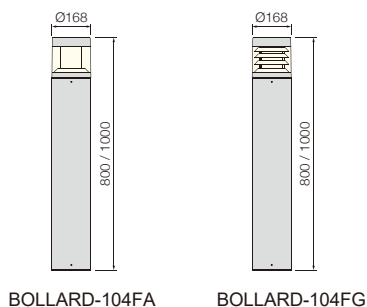

Technology Data

Code	Lamp	Input voltage	Output power	LED Pcs	Lumen	N.W.(kg)	G.W.(kg)	Packing box size (mm)
BOLLARD-104FA-H80	SMD, With driver	100V-240V	25W	144	2250	5.8	13.0	175×175×820 835×365×190
BOLLARD-104FA-H100		100V-240V	25W	144	2250	6.5	14.5	175×175×1020 1035×365×190
BOLLARD-104FG-H80	SMD, With driver	100V-240V	25W	144	1850	5.8	13.0	175×175×820 835×365×190
BOLLARD-104FG-H100		100V-240V	25W	144	1850	6.5	14.5	175×175×1020 1035×365×190
BOLLARD-104FA-H80E27	Fluorescent	100V-240V	21W	/	/	5.8	13.0	175×175×820 835×365×190
BOLLARD-104FA-H100E27		100V-240V	21W	/	/	6.5	14.5	175×175×1020 1035×365×190